

Hamilton Safe Modular Vault Panels Save Time And Construction Costs

Quality Service & Installation

Your Hamilton professional is an independent businessperson with a vested interest in your community and in making sure you are a satisfied customer. Installation crews and service technicians are always local representatives, friendly and quick to respond. Consult with a Hamilton professional about all your security needs.



In this second-story, two-vault, Class II installation, the first vault (at left) is complete. Floor and back wall of second vault are under construction.



Second vault consists of panels moved from an across-town installation. Panels may be welded or bolted together as required.



Following completion of the vault itself, technicians install a Hamilton vault door before final finishing operations.

Match your security needs

Choose from our new less-expensive panels or our high-performance panels. Hamilton Safe vault panels earned U.L. approval by withstanding severe torch and tool attacks. They meet or exceed all insurance standards.

Class M - 15 minutes Class I - 30 minutes
Class II - 60 minutes Class III - 120 minutes

Same vault space - less floor space

Because our panels are slimmer than identically rated reinforced concrete, you get more usable lobby space, as these examples illustrate. All vault examples have interior dimensions of 8'6" W x 12'0" L.

| | Exterior Dimensions | Exterior Square Footage | Reinforced Concrete | Hamilton Safe Vault Panels |
|-----------|--|-----------------------------------|---------------------|----------------------------|
| CLASS I | Reinforced Concrete (12" thick) | 10'6"W x 14'0"L | 147 sq. ft. | |
| | Hamilton Safe Vault Panels (5" thick) * | 9'4"W x 12'10"L | 119.8 sq. ft. | |
| | | Space Savings: 27.2 sq. ft | | |
| CLASS II | Reinforced Concrete (18" thick) | 11'6"W x 15'0"L | 172.5 sq. ft. | |
| | Hamilton Safe Vault Panels (8" thick) * | 9'8"W x 13'2"L | 127.3 sq. ft. | |
| | | Space Savings: 45.2 sq. ft | | |
| CLASS III | Reinforced Concrete (27" thick) | 13'0"W x 16'6"L | 214.5 sq. ft. | |
| | Hamilton Safe Vault Panels (12" thick) * | 10'2"W x 13'8"L | 139 sq. ft. | |
| | | Space Savings: 75.5 sq. ft | | |

* Through ongoing research and development, we strive to improve our products. Vault panel thickness may change while ASTM/U.L. class ratings remain the same, so specifications are subject to change without notice.


HAMILTON™

Manufacturers of the latest in drive-up systems, modular vaults, vault doors, night depositories, physical security containers, alarm systems, coin and currency dispensers, safe deposit boxes and video surveillance equipment.

3143 Production Drive • Fairfield, OH 45014
Telephone: 513/874-3733 • FAX: 513/874-3967
Visit our website at: www.hamiltonsafe.com

Hamilton Modular Vault Panels

The Vault That Grows With Your Needs

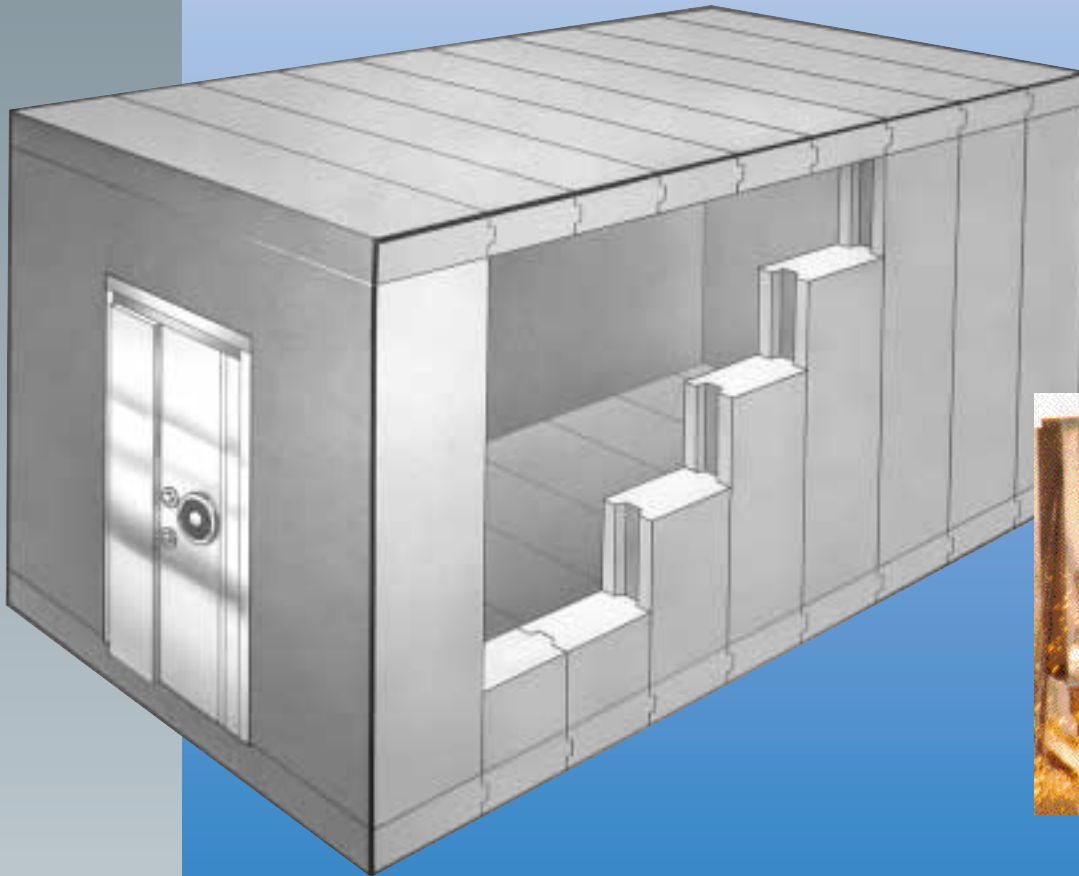

Technician attacks a Hamilton Vault Panel during a fiery U.L. rating test.



This is one vault solution that won't "lock you in." Hamilton Safe Modular Vault Panels grow with you to provide outstanding advantages:

- **Grows with your needs.**

For increased vault needs, branch consolidation or to create more space, just add more vault panels! Your Hamilton dealer can cost-effectively enlarge the existing vault at a fraction of the cost of changing a reinforced concrete vault. And vault panels can be arranged to fit a wide variety of shapes.

- **Rapid installation.**

Experienced technicians erect your vault in three days or less, eliminating weeks wasted waiting for concrete to cure or forms to be stripped.

- **True portability.**

Vault panels can be moved from one building to another. That's a real cost advantage when a branch is relocated or closed. Delivered in individual panels and quickly assembled on location, your vault can be delivered through any door—installed on almost any floor.

Hamilton Safe Vault Panels Give You High-Tech, Expandable Security

HAMILTON